

APLUS
High Performance Tyres

**PASS
UNIMPEDEDLY**



PERFORMANCE



A608



A606



A868



A999



**ALL TERRAIN
A929**



A867



A501



A502



A607(UHP/RF)



A919



**MUD TERRAIN
A929**



A866



A503



A909



A607



**MUD TERRAIN
A939**



A505

PCR

ALL SEASON

SUV

4X4

COMMERCIAL

WINTER

THE ROAD


A608 M+S



UTQG: 420 AA—500 AA

- Perfect handling performance and good cornering performance.
- Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.
- Nice driving pleasure comes from strong tread and soft sidewall.
- Silica tread compound for low rolling resistance and good wet grip.

Performance Test

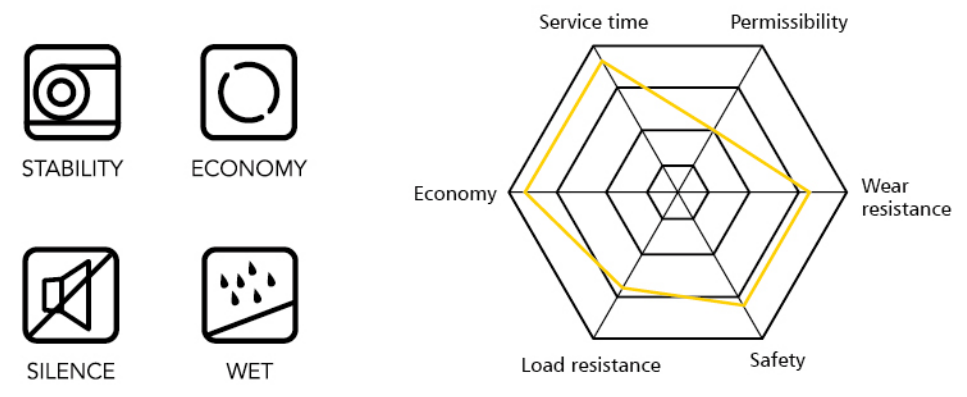

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155/65R13	-	73	T	7.1	157	4.50B	532	420 AA	365	805	300	44	BSW
165/65R13	-	77	T	7.1	170	5.00B	544	420 AA	412	908	300	44	BSW
165/70R13	-	79	T	6.9	170	5.00B	562	420 AA	437	963	300	44	BSW
165/80R13	-	83	T	7.6	165	4.50B	594	420 AB	487	1074	300	44	BSW
175/70R13	-	82	T	7.1	177	5.00B	576	420 AA	475	1047	300	44	BSW
185/70R13	-	86	T	7.3	189	5.50B	590	420 AA	530	1168	300	44	BSW
175/65R14	-	79	T	6.9	170	5.00B	562	420 AA	437	963	300	44	BSW
175/70R14	-	84	H	7.1	177	5J	602	480 AA	500	1102	300	44	BSW
185/60R14	-	82	H	7.3	189	5 1/2J	578	480 AA	475	1047	300	44	BSW
185/65R14	-	86	H	7.3	189	5 1/2J	596	480 AA	530	1168	300	44	BSW
185/70R14	-	88	H	7.3	189	5 1/2J	616	480 AA	560	1235	300	44	BSW
195/60R14	-	86	H	7.3	201	6J	590	480 AA	530	1168	300	44	BSW
195/70R14	-	91	H	7.3	201	6J	630	480 AA	615	1356	300	44	BSW
175/65R15	-	84	H	7.3	177	5J	609	480 AA	500	1102	300	44	BSW
185/55R15	-	82	V	7.6	194	6J	585	480 AA	475	1047	300	44	BSW
185/60R15	-	84	H	7.3	189	5 1/2J	603	480 AA	500	1102	300	44	BSW
185/65R15	-	88	H	7.3	189	5 1/2J	621	480 AA	560	1235	300	44	BSW
195/55R15	-	85	H	7.2	201	6 J	595	480 AA	515	1135	300	44	BSW
195/55R15	-	85	V	7.2	201	6J	595	480 AA	515	1135	300	44	BSW
195/60R15	-	88	H	7.6	201	6J	615	480 AA	560	1235	300	44	BSW
195/60R15	-	88	V	7.6	201	6J	615	480 AA	560	1235	300	44	BSW
195/65R15	-	91	H	7.3	201	6J	635	480 AA	615	1356	300	44	BSW
195/65R15	-	91	V	7.3	201	6J	635	480 AA	615	1356	300	44	BSW
205/60R15	-	91	V	7.8	209	6J	627	480 AA	615	1356	300	44	BSW
205/65R15	-	94	H	7.6	209	6J	647	480 AA	670	1477	300	44	BSW
205/70R15	-	96	H	7.8	209	6J	669	480 AA	710	1565	300	44	BSW
215/60R15	-	94	H	7.8	221	6 1/2J	639	480 AA	670	1477	300	44	BSW
215/65R15	-	96	H	8	221	6 1/2J	661	480 AA	710	1565	300	44	BSW
215/70R15	-	98	H	7.8	221	6 1/2J	683	480 AA	750	1653	300	44	BSW
205/55R16	-	91	H	7.2	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/55R16	-	91	V	7.2	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/60R16	-	92	V	7.8	209	6J	652	480 AA	630	1389	300	44	BSW
205/65R16	-	95	H	7.6	209	6J	672	500 AA	690	1521	300	44	BSW
215/55R16	-	93	H	7.4	226	7J	642	480 AA	650	1433	300	44	BSW
215/60R16	-	95	H	7.9	221	6 1/2J	664	480 AA	690	1521	300	44	BSW
215/65R16	-	98	H	8	221	6 1/2J	686	480 AA	750	1653	300	44	BSW
225/60R16	-	98	H	7.9	228	6 1/2J	676	480 AA	750	1653	300	44	BSW
235/60R16	-	100	H	8	240	7J	688	480 AA	800	1764	300	44	BSW

The labeling information is subject to change without notice.

A606 M+S



UTQG: 420 AA —560 AA

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.

Continuous solid center rib and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.

Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.

Performance Test



STABILITY




ECONOMY



SILENCE



WET

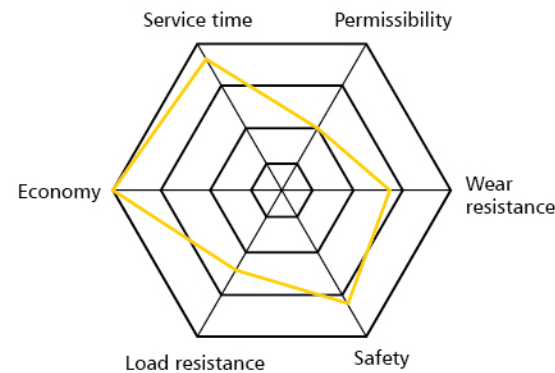

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
145/70R12	-	69	T	7.1	150	4.50B	509	420AA	325	716	300	44	BSW
155/70R12	-	73	T	7.1	157	4.50B	523	420AA	365	805	300	44	BSW
165/70R12	-	77	T	6.8	170	5.00B	537	420AA	412	908	300	44	BSW
155/65R13	-	73	T	7.6	157	4 1/2J	532	420AA	365	805	300	44	BSW
155/70R13	-	75	T	7.6	157	4 1/2J	548	420AB	387	853	300	44	BSW
155/80R13	-	79	T	7.6	157	4 1/2J	578	420AB	437	963	300	44	BSW
155/80R13 XL	-	83	S	7.6	157	4 1/2J	578	420AB	487	1074	340	50	BSW
165/65R13	-	77	T	7	170	5J	544	420AA	412	908	300	44	BSW
165/70R13	-	79	T	6.8	170	5J	562	420AA	437	963	300	44	BSW
165/80R13	-	83	T	7.3	165	4 1/2J	594	420AB	487	1073	300	44	BSW
165/70R13	-	79	T	6.8	170	5J	562	420AA	437	963	300	44	BSW
175/70R13	-	82	T	7	177	5J	576	420AA	475	1047	300	44	BSW
175/60R13	-	77	H	7	177	5.00B	540	420AA	412	908	300	44	BSW
175/70R13	-	82	T	7	177	5J	576	420AA	475	1047	300	44	BSW
185/70R13	-	86	T	7.6	189	5 1/2J	590	420AA	530	1168	300	44	BSW
155/65R14	-	75	H	7.1	157	4 1/2J	558	420AA	387	853	300	44	BSW
165/60R14	-	75	H	6.8	170	5J	554	420AA	387	853	300	44	BSW
165/65R14	-	79	H	6.8	170	5.00B	570	420AA	437	963	300	44	BSW
165/70R14	-	81	H	6.8	170	5J	588	420AA	462	1019	300	44	BSW
165/70R14 XL	-	85	T	6.8	170	5J	588	420AA	515	1135	340	50	BSW
175/60R14	-	79	H	6.8	177	5J	566	420AA	437	963	300	44	BSW
175/65R14 XL	-	86	T	7	177	5J	584	560AA	530	1168	340	50	BSW
175/70R14 XL	-	88	T	7	177	5J	602	560AA	560	1235	340	50	BSW
175/65R14	-	82	H	7	177	5J	584	560AA	475	1047	300	44	BSW
175/70R14	-	84	H	7	177	5J	602	560AA	500	1102	300	44	BSW
175/65R14	-	82	H	7	177	5J	584	560AA	475	1047	300	44	BSW
175/70R14	-	84	H	7	177	5J	602	560AA	500	1102	300	44	BSW
185/70R14	-	88	H	7.3	189	5 1/2J	616	560AA	560	1235	300	44	BSW
185/65R14	-	86	H	7.3	189	5 1/2J	596	560AA	530	1168	300	44	BSW
185/65R14	-	86	H	7.3	189	5 1/2J	596	560AA	530	1168	300	44	BSW
185/60R14	-	82	H	7.3	189	5 1/2J	578	560AA	475	1047	300	44	BSW
185/70R14	-	88	H	7.3	189	5 1/2J	616	560AA	560	1235	300	44	BSW
195/60R14	-	86	H	7.3	201	6J	590	560AA	530	1168	300	44	BSW
195/70R14	-	91	H	7.6	201	6J	630	560AA	615	1356	300	44	BSW
205/70R14	-	95	H	7.8	209	6J	644	560AA	690	1521	300	44	BSW
205/60R14	-	88	H	7.8	209	6J	602	560AA	560	1235	300	44	BSW
215/70R14	-	96	H	7.8	221	6 1/2J	658	560AA	710	1565	300	44	BSW
175/55R15	-	77	H	7	182	5 1/2J	573	420AA	412	908	300	44	BSW
175/60R15	-	81	H	7	177	5J	591	420AA	462	1019	300	44	BSW
175/65R15	-	84	H	7.1	177	5J	609	560AA	500	1102	300	44	BSW
185/55R15	-	82	V	7	194	6J	585	560AA	475	1047	300	44	BSW
185/60R15	-	84	H	7.3	189	5 1/2J	603	560AA	500	1102	300	44	BSW
185/65R15	-	88	H	7.3	189	5 1/2J	621	560AA	560	1235	300	44	BSW
185/55R15	-	82	H	7	194	6J	585	560AA	475	1047	300	44	BSW
185/60R15 XL	-	88	H	7.3	189	5 1/2J	603	560AA	560	1235	340	50	BSW
185/65R15 XL	-	92	T	7.3	189	5 1/2J	621	560AA	630	1389	340	50	BSW
185/65R15	-	88	H	7.3	189	5 1/2J	621	560AA	560	1235	300	44	BSW
195/65R15 XL	-	95	H	7.3	201	6J	635	560AA	690	1521	340	50	BSW
195/60R15	-	88	V	7.1	201	6J	615	560AA	560	1235	300	44	BSW
195/65R15	-	91	H	7.3	201	6J	635	560AA	615	1356	300	44	BSW
195/65R15	-	91	V	7.3	201	6J	635	560AA	615	1356	300	44	BSW
205/60R15	-	91	V	7.8	209	6J	627	560AA	615	1356	300	44	BSW
205/65R15	-	94	V	7.6	209	6J	647	560AA	670	1477	300	44	BSW
205/65R15	-	94	H	7.8	209	6J	647	560AA	670	1477	300	44	BSW
215/65R15	-	96	H	7.8	221	6 1/2J	661	560AA	710	1565	300	44	BSW
195/60R15	-	88	H	7.3	201	6J	615	560AA	560	1235	300	44	BSW
205/65R15	-	94	V	7.6	209	6J	647	560AA	670	1477	300	44	BSW
205/60R15	-	91	H	7.8	209	6J	627	560AA	615	1356	300	44	BSW
205/70R15	-	96	H	7.8	209	6J	669	560AA	710	1565	300	44	BSW
215/70R15	-	98	H	7.8	221	6 1/2J	683	560AA	750	1653	300	44	BSW
215/60R15	-	94	H	7.8	221	6 1/2J	639	560AA	670	1477	300	44	BSW
215/65R15	-	96	H	7.8	221	6 1/2J	661	560AA	710	1565	300	44	BSW
225/70R15	-	100	H	7.8	228	6 1/2J	697	560AA	800	1764	300	44	BSW
205/55R16	-	91	V	7.6	214	6 1/2J	632	560AA	615	1356	300	44	BSW
205/60R16	-	92	V	7.8	209	6J	652	560AA	630	1389	300	44	BSW
205/60R16	-	92	H	7.8	209	6J	652	560AA	630	1389	300	44	BSW
205/60R16 XL	-	96	H	7.8	209	6J	652	560AA	710	1565	340	50	BSW
205/65R16	-	95	H	7.8	209	6J	672	560AA	690	1521	300	44	BSW
215/55R16	-	93	H	7.8	226	7J	642	560AA	650	1433	300	44	BSW
215/60R16	-	95	V	7.8	221	6 1/2J	664	560AA	690	1521	300	44	BSW
215/60R16 XL	-	99	H	7.8	221	6 1/2J	664	560AA	775	1709	340	50	BSW
215/65R16	-	98	H	7.8	221	6 1/2J	686	560AA	750	1653	300	44	BSW
215/65R16	-	98	H	7.8	221	6 1/2J	686	560AA	750	1653	300	44	BSW
225/60R16	-	98	H	7.8	228	6 1/2J	676	560AA	750	1653	300	44	BSW
235/60R16	-	100	H	7.8	240	7J	688	560AA	800	1764	300	44	BSW

The labeling information is subject to change without notice.

A607 M+S



UTQG: 300 AA

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

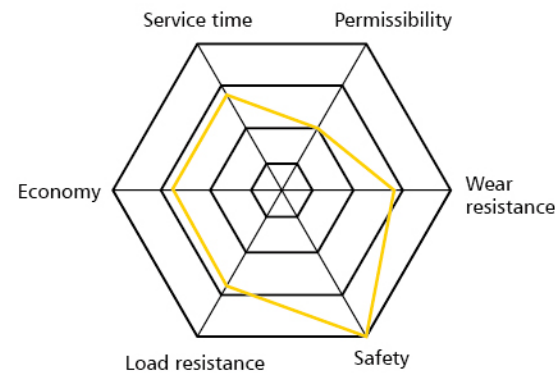

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	1bs	MAX Pressure Kpa	Psi	Sidewall Description
195/50R15	-	82	V	7.8	201	6J	577	300 AA	475	1047	300	44	BSW
195/55R15	-	85	V	7.8	201	6J	595	300 AA	515	1135	300	44	BSW
185/55R16 XL	-	87	V	7.0	194	6J	610	300 AA	545	1201	340	50	BSW
195/50R16 XL	-	84	V	7.0	195	6 1/2J	582	300 AA	500	1102	340	50	BSW
195/55R16 XL	-	88	V	7.0	201	6J	602	300 AA	560	1235	340	50	BSW
195/55R16 XL	-	91	V	7.0	201	6J	620	300 AA	615	1356	340	50	BSW
205/45ZR16 XL	-	87	W	7.0	206	7J	590	300 AA	545	1201	340	50	BSW
205/50ZR16 XL	-	91	W	7.8	214	6 1/2J	612	300 AA	615	1356	340	50	BSW
205/55ZR16 XL	-	94	W	7.8	214	6 1/2J	632	300 AA	670	1477	340	50	BSW
215/55ZR16 XL	-	97	W	7.8	226	7J	642	300 AA	730	1609	340	50	BSW
225/50ZR16 XL	-	96	W	7.0	233	7J	632	300 AA	710	1565	340	50	BSW
225/55ZR16 XL	-	99	W	7.8	223	7J	654	300 AA	775	1709	340	50	BSW
205/40ZR17 XL	-	84	W	7.8	212	7 1/2J	596	300 AA	500	1102	340	50	BSW
205/45ZR17 XL	-	88	W	7.0	206	7J	616	300 AA	560	1235	340	50	BSW
205/50ZR17 XL	-	93	W	7.8	214	6 1/2J	638	300 AA	650	1433	340	50	BSW
205/50ZR17 XL	-	93	W	7.0	214	6 1/2J	658	300 AA	650	1433	340	50	BSW
205/55ZR17 XL	-	95	W	7.0	214	6 1/2J	658	300 AA	690	1521	340	50	BSW
215/45ZR17 XL	-	91	W	7.8	213	7J	626	300 AA	615	1356	340	50	BSW
215/50ZR17 XL	-	95	W	7.8	226	7J	648	300 AA	690	1521	340	50	BSW
215/50ZR17 XL	-	95	Y	7.8	226	7J	648	300 AA	690	1521	340	50	BSW
215/55ZR17 XL	-	98	W	7.8	226	7J	668	300 AA	750	1653	340	50	BSW
225/45ZR17 XL	-	94	W	7.8	225	7 1/2J	634	300 AA	670	1477	340	50	BSW
225/45ZR17 XL	-	94	Y	7.8	225	7 1/2J	634	300 AA	670	1477	340	50	BSW
225/50ZR17 XL	-	98	W	7.8	233	7J	658	300 AA	750	1653	340	50	BSW
225/50ZR17 XL	-	98	Y	7.8	233	7J	658	300 AA	750	1653	340	50	BSW
225/55ZR17 XL	-	101	W	7.8	223	7J	680	300 AA	825	1819	340	50	BSW
235/45ZR17 XL	-	97	W	7.8	236	8J	644	300 AA	730	1609	340	50	BSW
235/45ZR17 XL	-	97	Y	7.8	236	8J	644	300 AA	730	1609	340	50	BSW
235/55ZR17 XL	-	103	W	7.0	245	7 1/2J	690	300 AA	875	1929	340	50	BSW
235/50ZR17 XL	-	100	W	7.0	245	7 1/2J	668	300 AA	800	1764	340	50	BSW
245/40ZR17 XL	-	95	W	7.0	248	8 1/2J	628	300 AA	690	1521	340	50	BSW
245/45ZR17 XL	-	99	W	7.0	243	8J	652	300 AA	775	1709	340	50	BSW
215/35ZR18 XL	-	84	W	7.8	218	7 1/2J	607	300 AA	500	1102	340	50	BSW
215/45ZR18 XL	-	93	W	7.0	213	7J	651	300 AA	650	1433	340	50	BSW
215/45ZR18 XL	-	93	Y	7.0	213	7J	651	300 AA	650	1433	340	50	BSW
225/40ZR18 XL	-	92	W	7.8	230	8J	637	300 AA	630	1389	340	50	BSW
225/40ZR18 XL	-	92	Y	7.8	230	8J	637	300 AA	630	1389	340	50	BSW
225/45ZR18 XL	-	95	W	7.8	225	7 1/2J	659	300 AA	690	1521	340	50	BSW
225/45ZR18 XL	-	95	Y	7.8	225	7 1/2J	659	300 AA	690	1521	340	50	BSW
235/40ZR18 XL	-	95	W	7.8	241	8 1/2J	645	300 AA	690	1521	340	50	BSW
235/40ZR18 XL	-	95	Y	7.8	241	8 1/2J	645	300 AA	690	1521	340	50	BSW
235/45ZR18 XL	-	98	W	7.0	236	8J	669	300 AA	750	1653	340	50	BSW
235/45ZR18 XL	-	98	Y	7.0	236	8J	669	300 AA	750	1653	340	50	BSW
235/50ZR18 XL	-	101	W	7.0	245	7 1/2J	693	300 AA	825	1819	340	50	BSW
235/50ZR18 XL	-	101	Y	7.0	245	7 1/2J	693	300 AA	825	1819	340	50	BSW
245/40ZR18 XL	-	97	W	7.0	248	8 1/2J	653	300 AA	730	1609	340	50	BSW
245/40ZR18 XL	-	97	Y	7.0	248	8 1/2J	653	300 AA	730	1609	340	50	BSW
245/45ZR18 XL	-	100	W	7.0	243	8J	677	300 AA	800	1764	340	50	BSW
245/45ZR18 XL	-	100	Y	7.0	243	8J	677	300 AA	800	1764	340	50	BSW
255/35ZR18 XL	-	94	W	7.0	260	9J	635	300 AA	670	1477	340	50	BSW
255/35ZR18 XL	-	94	Y	7.0	260	9J	635	300 AA	670	1477	340	50	BSW
255/40ZR18 XL	-	99	W	7.0	260	9J	661	300 AA	775	1709	340	50	BSW
255/40ZR18 XL	-	99	Y	7.0	260	9J	661	300 AA	775	1709	340	50	BSW
255/45ZR18 XL	-	103	W	7.0	255	8 1/2J	687	300 AA	875	1929	340	50	BSW
255/45ZR18 XL	-	103	Y	7.0	255	8 1/2J	687	300 AA	875	1929	340	50	BSW
225/35ZR19 XL	-	88	W	7.0	230	8J	641	300 AA	560	1235	340	50	BSW
225/35ZR19 XL	-	88	Y	7.0	230	8J	641	300 AA	560	1235	340	50	BSW
235/35ZR19 XL	-	91	W	7.0	241	8 1/2J	647	300 AA	615	1356	340	50	BSW
235/35ZR19 XL	-	91	Y	7.0	241	8 1/2J	647	300 AA	615	1356	340	50	BSW
245/35ZR19 XL	-	93	W	7.8	248	8 1/2J	655	300 AA	650	1433	340	50	BSW
245/35ZR19 XL	-	93	Y	7.8	248	8 1/2J	655	300 AA	650	1433	340	50	BSW
245/40ZR19 XL	-	98	W	7.0	248	8 1/2J	679	300 AA	750	1653	340	50	BSW
245/40ZR19 XL	-	98	Y	7.0	248	8 1/2J	679	300 AA	750	1653	340	50	BSW
245/45ZR19 XL	-	102	W	7.0	243	8J	703	300 AA	850	1874	340	50	BSW
245/45ZR19 XL	-	102	Y	7.0	243	8J	703	300 AA	850	1874	340	50	BSW
255/35ZR19 XL	-	96	W	7.0	260	9J	661	300 AA	710	1565	340	50	BSW
255/35ZR19 XL	-	96	Y	7.0	260	9J	661	300 AA	710	1565	340	50	BSW
225/35ZR20 XL	-	90	W	7.8	230	8J	666	300 AA	600	1323	340	50	BSW
225/35ZR20 XL	-	93	W	7.8	230	8J	666	300 AA	650	1433	340	50	BSW
225/35ZR20 XL	-	93	Y	7.8	230	8J	666	300 AA	650	1433	340	50	BSW
245/30ZR20 XL	-	90	W	7.0	248	8 1/2J	656	300 AA	600	1323	340	50	BSW
245/30ZR20 XL	-	97	W	7.0	248	8 1/2J	656	300 AA	730	1609	340	50	BSW
245/30ZR20 XL	-	97	Y	7.0	248	8 1/2J	656	300 AA	730	1609	340	50	BSW
245/35ZR20 XL	-	95	W	7.0	248	8 1/2J	680	300 AA	690	1521	340	50	BSW
245/35ZR20 XL	-	95	Y	7.0	248	8 1/2J	680	300 AA	690	1521	340	50	BSW
245/45ZR20 XL	-	103	W	7.0	243	8J	728	300 AA	875	1929	340	50	BSW
245/45ZR20 XL	-	103	Y	7.0	243	8J	728	300 AA	875	1929	340	50	BSW
255/35ZR20 XL	-	97	W	7.0	260	9J	686	300 AA	730	1609	340	50	BSW
255/35ZR20 XL	-	102	W	7.0	260	9J	686	300 AA	850	1874	340	50	BSW
255/35ZR20 XL	-	102	Y	7.0	260	9J	686	300 AA	850	1874	340	50	BSW
255/45ZR20 XL	-	105	W	7.0	255	8 1/2J	738	300 AA	925	2039	340	50	BSW
255/45ZR20 XL	-	105	Y	7.0	255	8 1/2J	738	300 AA	925	2039	340	50	BSW
275/40ZR20 XL	-	106	W	7.8	278	9 1/2J	728	300 AA	950	2094	340	50	BSW
275/40ZR20 XL	-	106	Y	7.8	278	9 1/2J	728	300 AA	950	2094	340	50	BSW
275/45ZR20 XL	-	110	W	7.8	273	9J	756	300 AA	1060	2337	340	50	BSW
275/45ZR20 XL	-	110	Y	7.8	273	9J	756	300 AA	1060	2337	340	50	BSW
305/35ZR20 XL	-	107	W	7.8	313	11J	722	300 AA	975	2149	340	50	BSW
315/35ZR20 XL	-	110	W	7.8	320	11J	722	300 AA	1060	2337	340	50	BSW
315/35ZR20 XL	-	110	Y	7.8	320	11J	728	300 AA	1060	2337	340	50	BSW
295/35ZR21 XL	-	107	W	7.8	301	10 1/2J	739	300 AA	975	2149	340	50	BSW
295/35ZR21 XL	-	107	Y	7.8	301	10 1/2J	739	300 AA	975	2149	340	50	BSW
295/40ZR21 XL	-	111	W	7.8	301	10 1/2J	769	300 AA	1090	2403	340	50	BSW
295/40ZR21 XL	-	111	Y	7.8	301	10 1/2J	769	300 AA	1090	2403	340	50	BSW

A607 M+S



UTQG: 300 AA

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
205/55RF16 XL	-	94	W	7.8	214	6 1/2J	632	300AA	670	1477	340	50	BSW
205/50RF17 XL	-	93	W	7.8	214	6 1/2J	638	300AA	650	1433	340	50	BSW
225/50RF17 XL	-	98	W	7.8	223	7J	658	300AA	750	1653	340	50	BSW
205/45RF17 XL	-	88	W	7	206	7J	616	300AA	560	1235	340	50	BSW
225/45RF17 XL	-	94	W	7.8	225	7 1/2J	634	300AA	670	1477	340	50	BSW
225/40RF18 XL	-	92	W	7.8	230	8J	637	300AA	630	1389	340	50	BSW
245/40RF18 XL	-	97	W	7	248	8 1/2J	653	300AA	730	1609	340	50	BSW
245/45RF18 XL	-	100	W	7	243	8J	677	300AA	800	1764	340	50	BSW
255/35RF18 XL	-	94	W	7	260	9J	635	300AA	670	1477	340	50	BSW

The labeling information is subject to change without notice.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

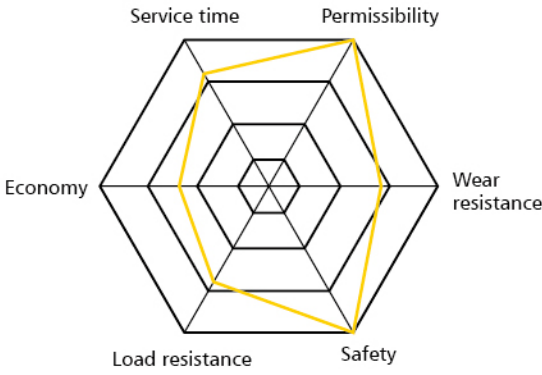

A909 M+S



UTQG: 420 AA—450 AA

The compound mixture ensures longevity without compromising on safety and performance.

This unique design offers stability in cornering, it has superior performance due to its superior design, where the Royal A/S provided performance as an all-rounder tyre, the Royal A/S provides superior performance in cornering on slippery conditions.

This design has a superior pitch frequency, which offers a considerable reduction in noise, offering a very comfortable and quite ride.

Superior high tensile steel belts for durability, nylon blend cap to maximizes the contact area with the road surface, all of these combined exceeds the goal of having a tyre which not only meets the needs of an exceptional all seasons tyre, but also provides exceptional performance.

Performance Test



STABILITY




ECONOMY



4 SEASON



WET

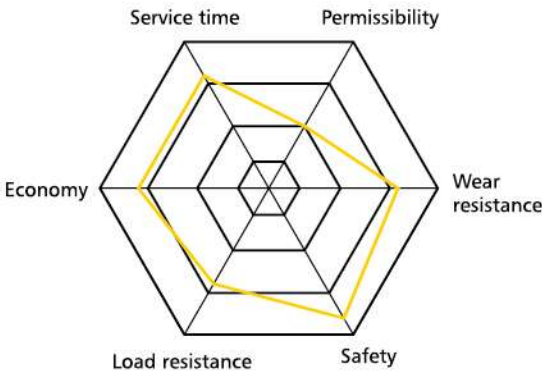

70-72

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155/65R13	-	73	T	7.6	157	4.50B	532	420 AA	365	805	300	44	BSW
155/70R13	-	75	T	7.6	157	4.50B	548	420 AA	387	853	300	44	BSW
155/80R13	-	79	T	7.6	157	4.50B	578	420 AB	437	963	300	44	BSW
165/70R13	-	79	T	7.6	170	5.00B	562	420 AA	437	963	300	44	BSW
175/65R13	-	80	T	7.6	177	5.00B	558	420 AA	450	992	300	44	BSW
175/70R13	-	82	T	7.6	177	5.00B	576	420 AA	475	1047	300	44	BSW
155/65R14	-	75	H	7.6	157	4 1/2J	558	420 AA	387	853	300	44	BSW
165/60R14	-	75	H	7.6	170	5J	554	420 AA	387	853	300	44	BSW
165/65R14	-	79	H	7.6	170	5J	570	420 AA	437	963	300	44	BSW
165/70R14	-	81	H	7.6	170	5J	588	420 AA	462	1019	300	44	BSW
175/65R14 XL	-	86	T	7.6	177	5J	584	420 AA	530	1168	340	50	BSW
175/70R14 XL	-	88	T	7.6	177	5J	602	420 AA	560	1235	340	50	BSW
185/60R14	-	82	H	7.8	189	5 1/2J	578	420 AA	475	1047	300	44	BSW
185/65R14	-	86	H	7.8	189	5 1/2J	596	420 AA	530	1168	300	44	BSW
185/55R14	-	80	H	7.8	194	6J	560	420 AA	450	992	300	44	BSW
185/70R14	-	88	H	7.8	189	5 1/2J	616	420 AA	560	1235	300	44	BSW
175/55R15	-	77	H	7.8	182	5 1/2J	573	420 AA	412	908	300	44	BSW
175/60R15	-	81	H	7.6	177	5J	591	420 AA	462	1019	300	44	BSW
175/65R15	-	84	H	7.8	177	5J	609	420 AA	500	1102	300	44	BSW
185/55R15	-	82	V	7.8	194	6 J	585	420 AA	475	1047	300	44	BSW
185/60R15 XL	-	88	H	7.8	189	5 1/2J	603	420 AA	560	1235	340	50	BSW
185/65R15 XL	-	92	T	7.8	189	5 1/2J	621	420 AA	630	1389	340	50	BSW
195/50R15	-	82	V	7.8	201	6 J	577	420 AA	475	1047	300	44	BSW
195/55R15	-	85	V	7.8	201	6J	595	420 AA	515	1135	300	44	BSW
195/60R15	-	88	H	7.8	201	6 J	615	420 AA	560	1235	300	44	BSW
195/65R15	-	91	H	7.8	201	6 J	635	420 AA	615	1356	300	44	BSW
205/65R15	-	94	V	7.8	209	6J	647	420 AA	670	1477	300	44	BSW
215/65R15	-	96	H	7.8	221	6 1/2J	661	420 AA	710	1565	300	44	BSW
195/45R16 XL	-	84	V	7.8	195	6 1/2J	582	420 AA	500	1102	340	50	BSW
195/50R16 XL	-	88	V	7.8	201	6J	602	420 AA	560	1235	340	50	BSW
195/55R16 XL	-	91	V	7.8	201	6 J	620	420 AA	615	1356	340	50	BSW
205/45R16 XL	-	87	W	7.8	206	7J	590	420 AA	545	1201	340	50	BSW
205/55R16 XL	-	94	V	7.8	214	6 1/2J	632	420 AA	670	1477	340	50	BSW
205/60R16 XL	-	96	H	7.8	209	6 J	652	420 AA	710	1565	340	50	BSW
215/45R16 XL	-	90	V	7.8	213	7J	600	420 AA	600	1323	340	50	BSW
215/55R16 XL	-	97	V	7.8	226	7J	642	420 AA	730	1609	340	50	BSW
215/60R16 XL	-	99	H	7.8	221	6 1/2J	664	420 AA	775	1709	340	50	BSW
215/65R16 XL	-	102	H	7.8	221	6 1/2J	686	420 AA	850	1874	340	50	BSW
215/70R16	-	100	H	7.8	221	6 1/2J	708	420 AA	800	1764	300	44	BSW
225/55R16 XL	-	99	W	7.8	233	7J	654	420 AA	775	1709	340	50	BSW
205/45R17 XL	-	88	W	7.8	206	7J	616	420 AA	560	1235	340	50	BSW
205/50R17 XL	-	93	W	7.8	214	6 1/2J	638	420 AA	650	1433	340	50	BSW
215/45R17 XL	-	91	W	7.8	213	7J	626	420 AA	615	1356	340	50	BSW
215/50R17 XL	-	95	W	7.8	226	7J	648	420 AA	690	1521	340	50	BSW
215/55R17 XL	-	98	W	7.8	226	7J	668	420 AA	750	1653	340	50	BSW
215/60R17 XL	-	100	V	7.8	221	6 1/2J	690	420 AA	800	1764	340	50	BSW
225/45R17 XL	-	94	W	7.8	225	7 1/2J	634	420 AA	670	1477	340	50	BSW
225/50R17 XL	-	98	W	7.8	233	7J	658	420 AA	750	1653	340	50	BSW
225/55R17 XL	-	101	W	7.8	233	7J	680	420 AA	825	1819	340	50	BSW
225/60R17 XL	-	103	V	7.8	228	6 1/2J	702	420 AA	875	1929	340	50	BSW
225/65R17 XL	-	106	V	7.8	228	6 1/2J	724	420 AA	950	2094	340	50	BSW
235/45R17 XL	-	97	W	7.8	236	8J	644	420 AA	730	1609	340	50	BSW
235/55R17 XL	-	103	W	7.8	245	7 1/2J	690	420 AA	875	1929	340	50	BSW
235/65R17 XL	-	108	V	7.8	240	7J	738	420 AA	1000	2205	340	50	BSW
225/40ZR18 XL	-	92	Y	7.8	230	8J	637	420 AA	630	1389	340	50	BSW
225/45R18 XL	-	95	W	7.8	225	7 1/2J	659	420 AA	690	1521	340	50	BSW
225/55R18 XL	-	102	V	7.8	233	7J	705	420 AA	850	1874	340	50	BSW
235/50R18 XL	-	101	W	7.8	245	7 1/2J	693	420 AA	825	1819	340	50	BSW
245/40ZR18 XL	-	97	Y	7.8	248	8 1/2J	653	450 AA	730	1609	340	50	BSW
245/45ZR18 XL	-	100	Y	7.8	243	8J	677	420 AA	800	1764	340	50	BSW

The labeling information is subject to change without notice.

A868 M+S



UTQG: 420 AB

Four main grooves provide good driving stability and wet performance.

Reasonable pattern area, perfect collocation of every grooves.

Special tread compound, ensure tire performance stability in all kinds of weather conditions.

White sidewall rib shows extraordinary appearance.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
P195/75R14	-	92	S	7.8	196	5 1/2J	648	420 AB	635	1400	300	44	WR
P205/75R14	-	95	S	7.8	203	5 1/2J	664	420 AB	695	1532	300	44	WR
P205/70R15	-	95	S	7.8	209	6J	669	420 AB	680	1499	300	44	WR
P205/75R15	-	97	T	7.9	203	5 1/2J	689	420 AB	725	1598	300	44	WR
P215/75R15	-	100	T	8.2	216	6J	703	420 AB	790	1742	300	44	WR
P225/70R15	-	100	T	7.9	228	6 1/2J	697	420 AB	795	1753	300	44	WR
P225/75R15	-	102	T	7.9	223	6J	719	420 AB	850	1874	300	44	WR
P235/75R15	-	105	S	8.2	235	6 1/2J	733	420 AB	920	2028	300	44	WR

Performance Test



STABILITY




4 SEASON



GOOD DESIGN



WET

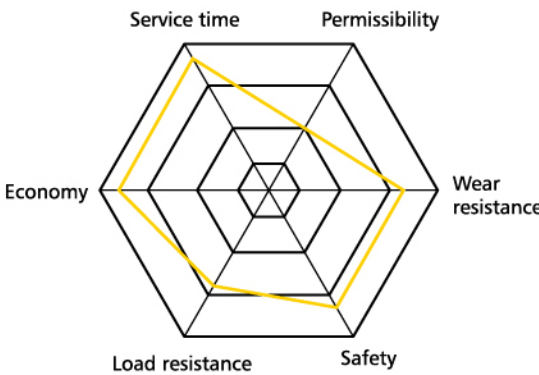

A919 M+S



UTQG: 420 AA

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

Performance Test




COMFORT

HIGH
PERFORMANCE

SILENCE



DRAINAGE

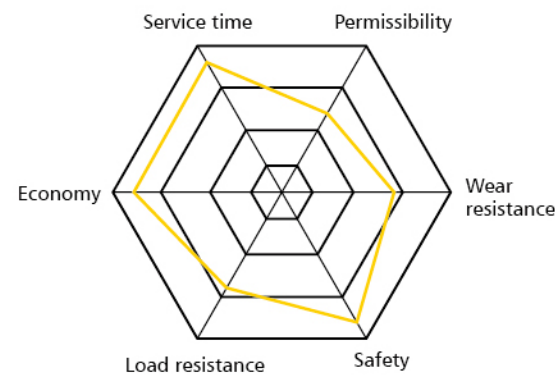

70-74

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
215/70R16	-	100	H	8.3	221	6 1/2J	708	420 AA	800	1764	300	44	BSW
225/70R16 XL	-	107	H	8.3	228	6 1/2J	722	420 AA	975	2149	340	50	BSW
235/70R16	-	106	H	8.3	240	7J	736	420 AA	950	2094	300	44	BSW
245/70R16	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
245/70R16 XL	-	111	H	8.3	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R16	-	109	H	8.3	260	7 1/2J	738	420 AA	1030	2271	300	44	BSW
255/70R16	-	111	H	8.3	260	7 1/2J	764	420 AA	1090	2403	300	44	BSW
265/70R16	-	112	H	8.3	272	8J	778	420 AA	1120	2469	300	44	BSW
275/70R16	-	114	H	8.3	279	8J	792	420 AA	1180	2601	300	44	BSW
215/60R17	-	96	H	8.3	221	6 1/2J	690	420 AA	710	1565	300	44	BSW
215/65R17	-	99	H	8.3	221	6 1/2J	712	420 AA	775	1709	300	44	BSW
225/60R17	-	99	H	8.3	228	6 1/2J	702	420 AA	775	1709	300	44	BSW
225/65R17	-	102	H	8.3	228	6 1/2J	724	420 AA	850	1874	300	44	BSW
235/60R17	-	102	H	8.3	240	7J	714	420 AA	850	1874	300	44	BSW
235/60R17 XL	-	106	H	8.3	240	7J	714	420 AA	950	2094	340	50	BSW
235/65R17	-	104	H	8.3	240	7J	738	420 AA	900	1984	300	44	BSW
245/65R17	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
245/65R17 XL	-	111	H	8.3	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R17	-	110	H	8.3	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	-	112	H	8.3	272	8J	776	420 AA	1120	2469	300	44	BSW
265/70R17	-	115	H	8.3	272	8J	804	420 AA	1215	2679	300	44	BSW
275/65R17	-	115	H	8.3	279	8J	790	420 AA	1215	2679	300	44	BSW
285/65R17	-	116	H	8.3	292	8 1/2J	802	420 AA	1250	2756	300	44	BSW
225/55R18	-	98	H	8.3	233	7J	705	420 AA	750	1653	300	44	BSW
225/60R18 XL	-	104	H	8.3	228	6 1/2J	727	420 AA	900	1984	340	50	BSW
235/55R18 XL	-	104	H	8.3	245	7 1/2J	715	420 AA	900	1984	340	50	BSW
235/60R18 XL	-	107	H	8.3	240	7J	739	420 AA	975	2149	340	50	BSW
235/65R18 XL	-	110	H	8.2	240	7J	763	420 AA	1060	2337	340	50	BSW
245/60R18	-	105	H	8.2	248	7J	751	420 AA	925	2039	300	44	BSW
255/70R18	-	113	H	8.2	260	7 1/2J	815	420 AA	1150	2535	300	44	BSW
265/60R18	-	110	H	8.3	272	8J	775	420 AA	1060	2337	300	44	BSW
275/60R18	-	113	H	8.3	179	8J	787	420 AA	1150	2535	300	44	BSW
275/65R18	-	116	H	8.2	279	8J	815	420 AA	1250	2756	300	44	BSW
285/60R18	-	116	H	8.3	292	8 1/2J	799	420 AA	1250	2756	300	44	BSW
LT225/75R16	10PR	115/112	S	8.3	223	6 J	744	-	1215/1120	2680/2470	550	80	BSW
LT235/85R16	10PR	120/116	S	8.3	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	8.3	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	S	8.3	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
LT245/75R17	10PR	121/118	S	8.3	248	7J	800	-	1450/1320	3195/2910	550	80	BSW
LT265/70R17	10PR	121/118	S	8.3	272	8J	804	-	1450/1320	3195/2910	550	80	BSW

The labeling information is subject to change without notice.

A607 M+S



UTQG: 300 AA—420 AA

Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



70-75

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
235/65R17 XL	-	108	H	8.3	240	7J	738	420 AA	1000	2205	340	50	BSW
245/65R17	-	107	H	8.3	248	7J	750	420 AA	975	2149	300	44	BSW
255/60R17 XL	-	110	V	7.8	260	7 1/2J	738	300 AA	1060	2337	340	50	BSW
255/65R17	-	110	H	8.3	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	-	112	H	8.3	272	8J	776	420 AA	1120	2469	300	44	BSW
255/55R18 XL	-	109	V	8.3	265	8J	737	300 AA	1030	2271	340	50	BSW
* 255/55R18 XL	-	109	Y	8.3	265	8J	737	300 AA	1030	2271	340	50	BSW
255/60R18 XL	-	112	V	7.8	260	7 1/2J	763	300 AA	1120	2469	340	50	BSW
225/55R19 XL	-	103	V	7.0	233	7J	731	300 AA	875	1929	340	50	BSW
235/55R19 XL	-	105	V	7.8	245	7 1/2J	741	300 AA	925	2039	340	50	BSW
* 235/55R19 XL	-	105	Y	7.8	245	7 1/2J	741	300 AA	925	2039	340	50	BSW
255/50R19 XL	-	107	V	7.8	265	8J	739	300 AA	975	2149	340	50	BSW
* 255/50R19 XL	-	107	Y	7.8	265	8J	739	300 AA	975	2149	340	50	BSW
255/55R19 XL	-	111	V	7.8	265	8J	763	300 AA	1090	2403	340	50	BSW
285/45R19 XL	-	111	V	7.8	285	9 1/2J	739	300 AA	1090	2403	340	50	BSW
* 285/45R19 XL	-	111	Y	7.8	285	9 1/2J	739	300 AA	1090	2403	340	50	BSW
245/55R19 XL	-	107	V	7.8	253	7 1/2J	753	300 AA	975	2149	340	50	BSW
265/50R20 XL	-	111	V	7.8	277	8 1/2J	774	300 AA	1090	2403	340	50	BSW
275/55R20 XL	-	117	V	7.8	284	8 1/2J	810	300 AA	1285	2833	340	50	BSW
275/60R20 XL	-	119	V	7.8	279	8J	838	300 AA	1360	2998	340	50	BSW
285/50R20 XL	-	116	V	7.8	297	9J	794	300 AA	1250	2756	340	50	BSW

*New sizes coming
The labeling information is subject to change without notice.

Performance Test



COMFORT




HIGH PERFORMANCE



SILENCE



DRAINAGE

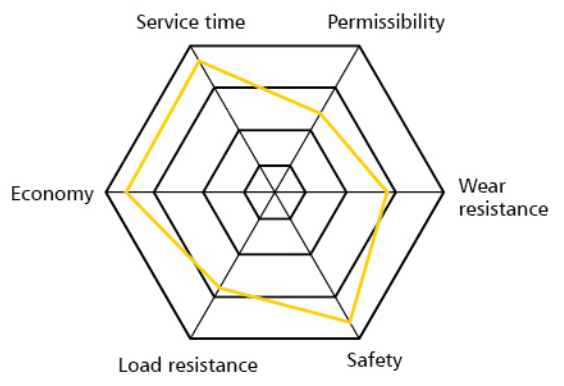

A999 M+S



UTQG: 500 AB

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.

Continuous block patterns on shoulder enhance the ride stability at cornering.

The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

Special tread compound provides the strong carcass to enhance the reliability and durability. The black letter styling provides a simple and classic image.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
P215/75R15	-	100	T	8.3	216	6 J	703	500 AB	800	1764	300	44	BSW
P225/75R15	-	102	T	8.3	223	6J	719	500 AB	850	1874	300	44	BSW
P235/75R15 XL	-	109	S	8.3	235	6 1/2J	733	500 AB	1030	2271	340	50	BSW
P215/70R16	-	100	T	8.3	221	6 1/2J	708	500 AB	800	1764	300	44	BSW
P225/70R16	-	103	T	8.3	228	6 1/2J	722	500 AB	875	1929	300	44	BSW
P235/70R16	-	106	T	8.8	240	7J	736	500 AB	950	2094	300	44	BSW
P245/70R16	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	BSW
P255/70R16	-	111	T	9.2	260	7 1/2J	764	500 AB	1090	2403	300	44	BSW
P265/70R16	-	112	T	8.8	272	8J	778	500 AB	1120	2469	300	44	BSW
P235/65R17	-	104	T	8.8	240	7J	738	500 AB	900	1984	300	44	BSW
P245/65R17	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	BSW
P265/65R17	-	112	T	8.8	272	8J	776	500 AB	1120	2469	300	44	BSW
P265/70R17	-	115	T	9.2	272	8J	804	500 AB	1215	2679	300	44	BSW
31x10.50R15LT	6PR	109	S	10.2	268	8 1/2J	775	500 AB	1030	2270	350	51	BSW
LT235/75R15	6PR	104/101	S	10.2	235	6 1/2J	733	500 AB	900/825	1985/1820	350	50	BSW
LT225/75R16	10PR	115/112	S	10.2	235	6 J	733	500 AB	1215/1120	2680/2470	550	80	BSW
LT245/75R16	10PR	120/116	S	10.2	248	7J	774	500 AB	1380/1260	3042/2778	550	80	BSW
LT235/85R16	10PR	120/116	S	10.2	235	6 1/2J	806	500 AB	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	S	10.2	267	7 1/2J	804	500 AB	1550/1400	3415/3085	550	80	BSW
LT245/75R17	10PR	121/118	S	10.2	248	7J	800	500 AB	1450/1320	3195/2910	550	80	BSW
LT265/70R17	10PR	121/118	S	10.2	272	7J	804	500 AB	1450/1320	3195/2910	550	80	BSW

Performance Test



4 SEASON




DRAINAGE



BRAKING



STABILITY

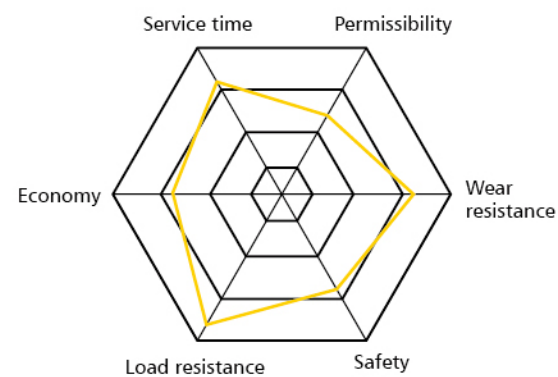

ALL TERRAIN

A929 M+S



UTQG: 500 AB

Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.

The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Performance Test



4 SEASON




DRAINAGE



BRAKING



STABILITY

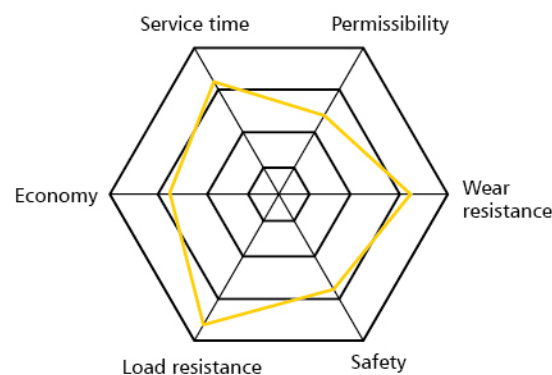

70-73

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
P205/75R15	-	97	T	8.2	203	5 1/2J	689	500 AB	725	1598	300	44	OWL
P215/75R15	-	100	T	8.2	216	6J	703	500 AB	800	1764	300	44	OWL
P225/75R15	-	102	T	8.2	223	6J	719	500 AB	850	1874	300	44	OWL
P235/75R15 XL	-	109	S	8.7	235	6 1/2J	733	500 AB	1030	2271	340	50	OWL
P265/70R15	-	112	T	9.2	272	8J	753	500 AB	1120	2469	300	44	OWL
P215/70R16	-	100	T	8.2	221	6 1/2J	708	500 AB	800	1764	300	44	BSW
P215/70R16	-	99	T	8.2	221	6 1/2J	708	500 AB	775	1709	300	44	BSW
P225/70R16	-	101	T	8.2	228	6 1/2J	722	500 AB	825	1819	300	44	OWL
P225/70R16	-	103	T	8.2	228	6 1/2J	722	500 AB	875	1929	300	44	OWL
P235/70R16	-	106	T	8.8	240	7J	736	500 AB	950	2094	300	44	OWL
P235/70R16	-	104	T	8.8	240	7J	736	500 AB	900	1984	300	44	OWL
P245/70R16	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	OWL
P245/70R16 XL	-	111	S	8.8	248	7J	750	500 AB	1090	2403	340	50	OWL
P245/70R16	-	106	T	8.8	248	7J	750	500 AB	950	2094	300	44	OWL
P255/70R16	-	109	T	9.2	260	7 1/2J	764	500 AB	1030	2271	300	44	OWL
P255/70R16	-	111	T	9.2	260	7 1/2J	764	500 AB	1090	2403	300	44	OWL
P265/70R16	-	112	T	9.2	272	8J	778	500 AB	1120	2469	300	44	OWL
P265/70R16	-	111	T	9.2	272	8J	778	500 AB	1090	2403	300	44	OWL
P275/70R16	-	114	T	9.2	279	8J	792	500 AB	1180	2601	300	44	OWL
P235/65R17	-	104	T	8.8	240	7J	738	500 AB	900	1984	300	44	BSW
P245/65R17	-	107	T	8.8	248	7J	750	500 AB	975	2149	300	44	BSW
P255/65R17	-	110	T	8.7	260	7 1/2J	764	500 AB	1060	2337	300	44	OWL
P265/65R17	-	110	T	8.7	272	8J	776	500 AB	1060	2337	300	44	OWL
P265/65R17	-	112	T	8.7	272	8J	776	500 AB	1120	2469	300	44	OWL
P265/70R17	-	113	T	9.2	272	8J	804	500 AB	1150	2535	300	44	OWL
P265/70R17	-	115	T	9.0	272	8J	804	500 AB	1215	2679	300	44	OWL
P275/65R17	-	115	T	9.2	279	8J	790	500 AB	1215	2679	300	44	OWL
P275/55R20 XL	-	117	T	8.7	284	8 1/2J	810	500 AB	1285	2833	340	50	BSW
P275/60R20 XL	-	119	T	8.7	279	8J	838	500 AB	1360	2998	340	50	BSW
185/75R16C	8PR	104/102	S	8.1	184	5J	684	-	900/850	1985/1875	450	65	BSW
205R16C	8PR	110/108	S	8.2	208	6J	736	-	1060/1000	2335/2205	450	65	BSW
215R15C	8PR	112/110	S	8.7	218	6J	725	-	1120/1060	2470/2337	450	65	BSW
215/70R15C	8PR	109/107	R	8.2	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
245/75R15C	6PR	109/107	S	11.2	248	7J	749	-	1030/975	2270/2150	375	55	BSW
255/70R15C	6PR	112/110	S	8.2	260	7 1/2J	739	-	1120/1060	2470/2335	375	55	BSW
LT235/75R15	6PR	104/101	S	11.2	235	6 1/2J	733	-	900/825	1985/1820	350	50	OWL
31x10.50R15LT	6PR	109	S	11.7	268	8 1/2J	775	-	1030	2270	350	51	OWL
LT215/85R16	10PR	115/112	S	10.9	216	6J	772	-	1215/1120	2680/2470	550	80	OWL
LT225/75R16	10PR	115/112	S	10.9	223	6J	744	-	1215/1120	2680/2470	550	80	OWL
LT225/75R16	12PR	119/116	Q	11.2	223	6J	744	-	1360/1250	3000/2755	650	95	OWL
LT235/85R16	10PR	120/116	S	11.7	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	11.3	248	7J	774	-	1380/1260	3042/2778	550	80	OWL
LT265/75R16	10PR	123/120	S	11.7	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	OWL
LT285/75R16	8PR	122/119	S	11.6	286	8J	834	-	1500/1360	3305/3000	450	65	OWL
LT245/75R17	10PR	121/118	S	11.2	248	7J	800	-	1450/1320	3195/2910	550	80	OWL
LT265/70R17	10PR	121/118	S	11.7	272	8J	804	-	1450/1320	3195/2910	550	80	OWL
LT275/65R18	10PR	123/120	S	11.2	278	8J	815	-	1550/1400	3415/3085	550	80	BSW
LT275/70R18	10PR	125/122	S	11.2	279	8J	843	-	1650/1500	3640/3305	550	80	BSW

The labeling information is subject to change without notice.

MUD TERRAIN

A929 M+S



Three main zigzag grooves and aggressive pattern design provide outstanding traction on all of road conditions.

High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.

The block road design with multiple-sipes provide outstanding off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and conering performance.

Jointless Nylon band and strong structure design provide the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
31x10.50R15LT	6PR	109	Q	13.2	268	8 1/2J	775	-	1030	2270	350	51	BSW
33x12.50R15LT	6PR	108	Q	13.2	318	10J	826	-	1000	2205	250	35	BSW
35x12.50R15LT	6PR	113	Q	13.2	318	10J	877	-	1150	2535	250	35	BSW
LT235/85R16	10PR	120/116	Q	13.2	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	Q	13.2	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	Q	13.2	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
LT285/75R16	10PR	126/123	Q	13.2	286	8J	834	-	1700/1550	3750/3415	550	80	BSW
305/70R16LT	10PR	124/121	Q	13.2	311	9J	840	-	1600/1450	3525/3195	450	65	BSW
315/75R16LT	10PR	127/124	Q	13.2	313	8 1/2J	884	-	1750/1600	3860/3525	450	65	BSW
LT265/70R17	10PR	121/118	Q	13.2	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
LT285/70R17	10PR	121/118	Q	13.2	292	8 1/2J	832	-	1450/1320	3195/2910	550	80	BSW
33x12.50R17LT	10PR	120	Q	13.2	318	10J	832	-	1400	3085	450	65	BSW
35x12.5R17LT	10PR	121	Q	13.2	318	10J	877	-	1450	3195	450	65	BSW
37x12.50R17LT	8PR	124	Q	13.2	318	10J	934	-	1600	3525	350	50	BSW
33x12.50R18LT	10PR	118	Q	13.2	318	10J	832	-	1320	2910	450	65	BSW
35x12.50R18LT	10PR	123	Q	13.2	318	10J	883	-	1550	3415	450	65	BSW

Performance Test



GOOD DESIGN




4 SEASON



BRAKING



DRAINAGE

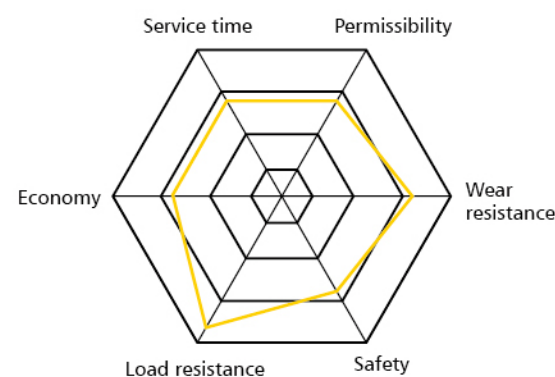

MUD TERRAIN

A939 M+S



Off-Road Maximum Traction Tyre, designed for extreme 4X4 application, confidence in performance on muddy, snowy and rocky terrain as well as sealed road performance, with extra ground clearance, higher load-carrying capacity, and greater ability to go off-road. 4X4 enthusiasts know it for its long wear, low noise and aggressive tread pattern.

Strategically placed ribs within the lateral grooves of the tread design help to discharge stones and resist stone drilling.

Specially developed tread compound helps resist the cutting, tearing and chunking commonly developed in extended off-road applications.

Strategically placed in the lower side wall area, a raised rim protector helps protect the wheel and tyre from hazards in off-road driving conditions.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	lbs	Kpa	Psi	
33x12.50R20LT	10PR	114	Q	14.2	318	10J	826	-	1180	2600	450	65	BSW
35x12.50R20LT	10PR	121	Q	14.2	318	10J	877	-	1450	3195	450	65	BSW
35x12.50R22LT	10PR	117	Q	14.2	318	10J	877	-	1285	2835	450	65	BSW
37x12.50R22LT	10PR	123	Q	14.2	318	10J	928	-	1550	3415	450	65	BSW

Performance Test



GOOD DESIGN




4 SEASON



BRAKING



DRAINAGE

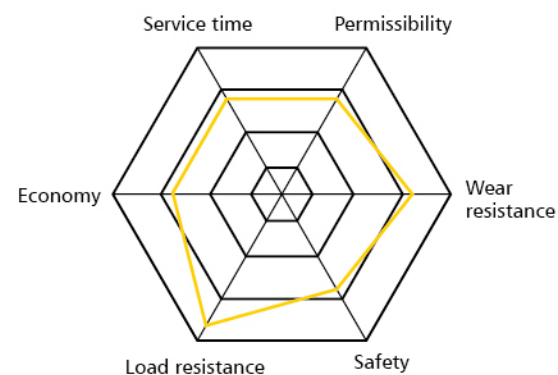

A867 M+S



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all of road condition.

Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Performance Test



STABILITY




ECONOMY



SILENCE



WET

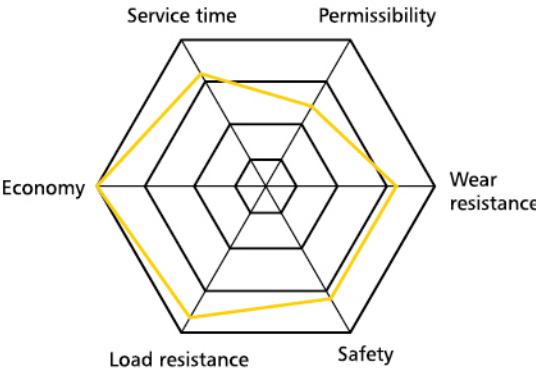

71-72

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
145R12C	8PR	86/84	Q	7.8	147	4.00B	542	-	530/500	1170/1100	450	65	BSW
155R12C	8PR	88/86	Q	7.8	157	4.50B	550	-	560/530	1235/1170	450	65	BSW
155R13C	6PR	85/83	Q	7.8	157	4.50B	578	-	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	Q	7.8	157	4.50B	578	-	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	7.8	167	4.50B	596	-	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93	R	7.8	167	4.50B	596	-	670/650	1475/1435	450	65	BSW
165/70R13C	6PR	88/86	S	7.8	170	5.00B	562	-	560/530	1235/1170	375	55	BSW
175R14C	8PR	99/98	R	7.8	178	5J	634	-	775/750	1710/1655	450	65	BSW
165/70R14C	6PR	89/87	R	7.8	170	5J	588	-	580/545	1280/1200	375	55	BSW
175/65R14C	6PR	90/88	T	8.2	177	5J	584	-	600/560	1325/1235	375	55	BSW
175/70R14C	8PR	95/93	S	7.8	177	5J	602	-	690/650	1520/1435	375	55	BSW
185R14C	8PR	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
195R14C	8PR	106/104	R	8.2	198	5 1/2J	666	-	950/900	2095/1985	450	65	BSW
205R14C	8PR	109/107	R	8.2	208	6J	686	-	1030/975	2270/2150	450	65	BSW
205R14LT	8PR	107/105	R	8.2	208	6J	684	-	975/925	2150/2040	450	65	BSW
195/70R15C	8PR	104/102	R	9.2	201	6J	655	-	900/850	1985/1875	450	65	BSW
195R15C	8PR	106/104	R	8.2	196	5 1/2J	693	-	950/900	2095/1985	450	65	BSW
195/70R15C	8PR	99/96	R	9.2	201	6J	655	-	775/710	1710/1565	450	65	BSW
205/70R15C	8PR	106/104	R	8.5	209	6J	669	-	950/900	2095/1985	450	65	BSW
215/65R15C	6PR	104/102	R	8.5	221	6 1/2J	661	-	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	8.5	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	8.7	228	6 1/2J	697	-	1120/1060	2470/2335	450	65	BSW
175/75R16C	8PR	101/99	R	7.8	177	5J	668	-	825/775	1820/1710	475	69	BSW
185/75R16C	8PR	104/102	R	8.1	184	5J	684	-	900/850	1985/1875	475	69	BSW
185/75R16C	8PR	100/97	R	8.1	184	5J	684	-	800/730	1765/1610	450	65	BSW
195/75R16C	8PR	107/105	R	8.2	196	5 1/2J	698	-	975/925	2150/2040	475	69	BSW
195/65R16C	8PR	104/102	R	8.4	201	6J	660	-	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	102/99	R	8.8	196	5 1/2J	698	-	850/775	1875/1710	450	65	BSW
195/65R16C	8PR	99/96	R	8.4	201	6J	660	-	775/710	1710/1565	450	65	BSW
205/65R16C	8PR	107/105	T	8.7	209	6J	672	-	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	101/98	T	8.7	209	6J	672	-	825/750	1820/1655	450	65	BSW
205/75R16C	8PR	110/108	R	8.5	203	5 1/2J	714	-	1060/1000	2335/2205	475	69	BSW
215/75R16C	8PR	113/111	R	8.5	216	6J	728	-	1150/1090	2535/2405	475	69	BSW
215/65R16C	8PR	109/107	T	8.7	221	6 1/2J	686	-	1030/975	2270/2150	475	69	BSW
225/65R16C	8PR	112/110	T	8.7	228	6 1/2J	698	-	1120/1060	2470/2335	475	69	BSW
235/65R16C	8PR	115/113	R	10	240	7J	712	-	1215/1150	2680/2535	475	69	BSW

The labeling information is subject to change without notice.

A866 M+S



Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.

Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.

White sidewall rib shows extraordinary appearance.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155R13C	6PR	85/83	R	7.8	157	4.50B	578	-	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	R	7.8	157	4.50B	578	-	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	7.8	167	4.50B	596	-	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93R	R	7.8	167	4.50B	596	-	670/650	1475/1435	450	65	BSW
185R14C	8PR	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
195R14C	8PR	106/104	R	8.2	198	5 1/2J	666	-	950/900	2095/1985	450	65	WR
205/75R14C	8PR	109/107	R	8.7	203	5 1/2J	664	-	1030/975	2270/2150	475	69	WR
195R15C	8PR	106/104	R	8.2	196	5 1/2J	693	-	950/900	2095/1985	450	65	WR
185R15C	8PR	103/102	R	8.2	188	5 1/2J	674	-	875/850	1930/1875	450	65	WR
205/75R15C	8PR	109/107	R	8.7	203	5 1/2J	689	-	1030/975	2270/2150	475	69	WR

Performance Test



STABILITY




ECONOMY



4 SEASON



DRAINAGE

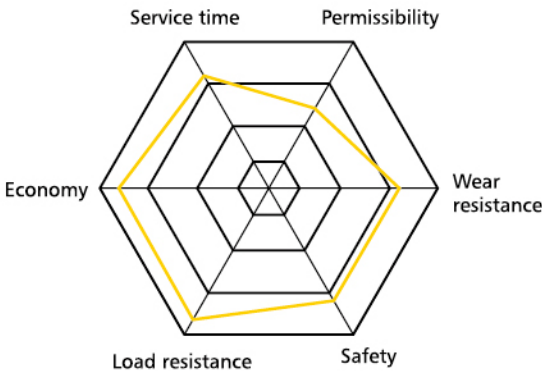

A501 M+S



Central straight & Z wide Zig-Zag circumferential grooves, with the design of convexes in the bottom, improve the traction, shorten braking distance and increase the stability on the snow road.

Wide rolling tread, by using computer-optimized design, makes sure enough contact area for more grip. The wide open shoulder grooves prevent aquaplaning with enhanced wet grip and provide excellent water & snow evacuation.

Bionic tread pattern design makes whole tread blocks' stiffness more with the optimized deployment of "Z" shape sipes, provide great grip on snow & ice condition.

Special tread compound remains flexible at lower temperatures to make sure the grip on winter road condition, while reduce the rolling resistance.

Performance Test



STABILITY




SNOW&ICE



BRAKING



DRAINAGE

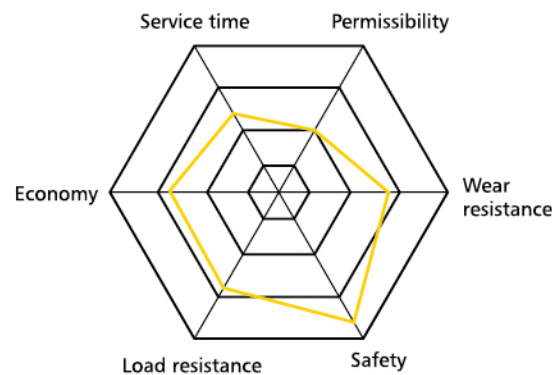

70-73

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/70R13	-	82	T	8.3	177	5.00B	576	-	475	1047	300	44	BSW
155/65R14	-	75	T	7.8	157	4 1/2J	558	-	387	853	300	44	BSW
165/60R14	-	75	T	7.8	170	5J	554	-	387	853	300	44	BSW
165/65R14	-	79	T	7.8	170	5J	570	-	437	963	300	44	BSW
165/70R14 XL	-	85	T	7.8	170	5J	588	-	515	1135	340	50	BSW
175/65R14	-	82	T	8.3	177	5J	584	-	475	1047	300	44	BSW
175/70R14 XL	-	88	T	8.3	177	5J	602	-	560	1235	340	50	BSW
185/60R14	-	82	T	8.3	189	5 1/2J	578	-	475	1047	300	44	BSW
185/65R14	-	86	T	8.3	189	5 1/2J	596	-	530	1168	300	44	BSW
185/70R14 XL	-	92	T	8.3	189	5 1/2J	616	-	630	1389	340	50	BSW
195/70R14 XL	-	95	T	8.3	201	6J	630	-	690	1521	340	50	BSW
175/65R15	-	84	T	8.2	177	5J	609	-	500	1102	300	44	BSW
185/55R15	-	82	H	8.2	194	6J	585	-	475	1047	300	44	BSW
185/60R15 XL	-	88	H	8.3	189	5 1/2J	603	-	560	1235	340	50	BSW
185/65R15	-	88	H	8.3	189	5 1/2J	621	-	560	1235	300	44	BSW
195/60R15	-	88	H	8.3	201	6J	615	-	560	1235	300	44	BSW
195/65R15 XL	-	95	T	8.3	201	6 J	635	-	690	1521	340	50	BSW
205/65R15	-	94	H	8.3	209	6J	647	-	670	1477	300	44	BSW
215/70R15	-	98	T	8.3	221	6 1/2J	683	-	750	1653	300	44	BSW
205/55R16	-	91	H	8.3	214	6 1/2J	632	-	615	1356	300	44	BSW
205/55R16	-	94	H	8.3	214	6 1/2J	632	-	670	1477	340	50	BSW
205/60R16 XL	-	96	H	8.3	209	6J	652	-	710	1565	340	50	BSW
215/60R16 XL	-	99	H	8.3	221	6 1/2J	664	-	775	1709	340	50	BSW
215/65R16	-	98	H	8.3	221	6 1/2J	686	-	750	1653	300	44	BSW
215/70R16	-	100	T	8.2	221	6 1/2J	708	-	800	1764	300	44	BSW
225/60R16	-	98	H	8.3	228	6 1/2J	676	-	750	1653	300	44	BSW
225/65R16	-	100	H	8.2	228	6 1/2J	698	-	800	1764	300	44	BSW
225/70R16 XL	-	107	T	8.2	228	6 1/2J	722	-	975	2149	340	50	BSW
235/65R16	-	103	H	8.2	240	7J	712	-	875	1929	300	44	BSW
235/70R16	-	106	T	8.3	240	7J	736	-	950	2094	300	44	BSW
245/70R16 XL	-	111	T	8.2	248	7J	750	-	1090	2403	340	50	BSW
265/70R16	-	112	T	8.2	272	8J	778	-	1120	2469	300	44	BSW
215/60R17	-	96	H	8.2	221	6 1/2J	690	-	710	1565	300	44	BSW
215/65R17	-	99	H	8.2	221	6 1/2J	712	-	775	1709	300	44	BSW
225/60R17	-	99	H	8.2	228	6 1/2J	702	-	775	1709	300	44	BSW
225/65R17	-	102	T	8.3	228	6 1/2J	724	-	850	1874	300	44	BSW
235/65R17 XL	-	108	T	8.3	240	7J	738	-	1000	2205	340	50	BSW
245/65R17 XL	-	111	T	8.3	248	7J	750	-	1090	2403	340	50	BSW
265/65R17	-	112	T	8.2	272	8J	776	-	1120	2469	300	44	BSW
265/70R17	-	115	T	8.3	272	8J	804	-	1215	2679	300	44	BSW
275/55R20 XL	-	117	H	8.5	284	8 1/2J	810	-	1285	2833	340	50	BSW
275/60R20 XL	-	119	H	8.5	279	8J	838	-	1360	2998	340	50	BSW
195/70R15C	8PR	104/102	R	9.2	201	6J	655	-	900/850	1985/1875	450	65	BSW
215/65R15C	6PR	104/102	R	9.2	221	6 1/2J	661	-	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	9.2	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	9.2	228	6 1/2J	697	-	1120/1060	2470/2335	450	65	BSW
185/75R16C	8PR	104/102	R	8.7	184	5J	684	-	900/850	1985/1875	475	69	BSW
195/65R16C	8PR	104/102	R	9.2	201	6J	660	-	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	8.7	196	5 1/2J	698	-	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	107/105	R	9.2	209	6J	672	-	975/925	2150/2040	475	69	BSW
215/65R16C	8PR	109/107	R	9.2	221	6 1/2J	686	-	1030/975	2270/2150	475	69	BSW
215/75R16C	8PR	113/111	R	9.2	216	6J	728	-	1150/1090	2535/2405	475	69	BSW
225/65R16C	8PR	112/110	R	9.2	228	6 1/2J	698	-	1120/1060	2470/2335	475	69	BSW
235/65R16C	8PR	115/113	R	9.7	240	7J	712	-	1215/1150	2680/2535	475	69	BSW
LT225/75R16	10PR	115/112	S	10.2	223	6J	744	-	1215/1120	2680/2470	550	80	BSW
LT245/75R16	10PR	120/116	S	10.2	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT245/70R17	10PR	119/116	S	10.7	248	7J	776	-	1360/1250	3000/2755	550	80	BSW
LT265/70R17	10PR	121/118	S	10.7	272	8J	804	-	1450/1320	3195/2910	550	80	BSW
LT275/65R18	10PR	123/120	S	10.7	279	8J	815	-	1550/1400	3415/3085	550	80	BSW
LT275/70R18	10PR	125/122	S	10.7	279	8J	843	-	1650/1500	3640/3305	550	80	BSW

The labeling information is subject to change without notice.

A502 M+S



Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Continuous outside tread blocks enhance excellent performance and precise control when cornering at highspeed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

Special tread compound remain flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.


Performance Test


SNOW&ICE


COMFORT


HIGH PERFORMANCE


SILENCE

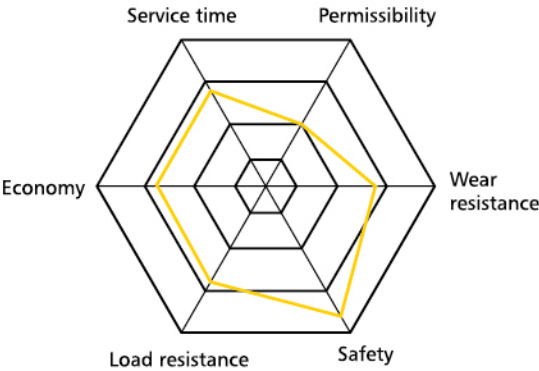

 E-C

 E-C

 70-73

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13	-	79	T	7.8	170	5.00B	562	-	437	963	300	44	BSW
185/60R14	-	82	T	8.3	189	5 1/2J	578	-	475	1047	300	44	BSW
195/50R15	-	82	H	8.3	201	6J	577	-	475	1047	300	44	BSW
195/55R15	-	85	H	8.3	201	6J	595	-	515	1135	300	44	BSW
195/60R15	-	88	H	8.3	201	6J	615	-	560	1235	300	44	BSW
195/65R15	-	91	H	8.3	201	6J	635	-	615	1356	300	44	BSW
195/65R15	-	91	T	8.3	201	6J	635	-	615	1356	300	44	BSW
195/65R15	-	95	T	8.3	201	6J	635	-	690	1521	340	50	BSW
195/55R16 XL	-	91	H	8.3	201	6J	620	-	615	1356	340	50	BSW
205/55R16	-	91	H	8.3	214	6 1/2J	632	-	615	1356	300	44	BSW
205/55R16	-	94	H	8.3	214	6 1/2J	632	-	670	1477	340	50	BSW
215/55R16 XL	-	97	H	8.3	226	7J	642	-	730	1609	340	50	BSW
225/55R16 XL	-	99	H	8.3	233	7J	654	-	775	1709	340	50	BSW
205/50R17 XL	-	93	H	8.2	214	6 1/2J	638	-	650	1433	340	50	BSW
215/50R17 XL	-	95	H	8.2	226	7J	648	-	690	1521	340	50	BSW
215/55R17 XL	-	98	H	8.2	226	7J	668	-	750	1653	340	50	BSW
225/45R17 XL	-	94	H	8.3	225	7 1/2J	634	-	670	1477	340	50	BSW
225/50R17 XL	-	98	H	8.2	233	7J	658	-	750	1653	340	50	BSW
225/55R17 XL	-	101	H	8.2	223	7J	680	-	825	1819	340	50	BSW
235/45R17 XL	-	97	H	8.3	236	8J	644	-	730	1609	340	50	BSW
235/55R17 XL	-	103	H	8.2	245	7 1/2J	690	-	875	1929	340	50	BSW
225/40R18 XL	-	92	H	8.2	230	8J	637	-	630	1389	340	50	BSW
225/45R18 XL	-	95	H	8.2	225	7 1/2J	659	-	690	1521	340	50	BSW
235/45R18 XL	-	98	H	8.2	236	8J	669	-	750	1653	340	50	BSW
235/55R18 XL	-	104	H	8.2	245	7 1/2J	715	-	900	1984	340	50	BSW
235/60R18 XL	-	107	H	8.2	240	7J	739	-	975	2149	340	50	BSW
245/45R18 XL	-	100	H	8.2	243	8J	677	-	800	1764	340	50	BSW
245/60R18	-	105	H	8.2	248	7J	751	-	925	2039	300	44	BSW
255/55R18 XL	-	109	H	8.2	265	8J	737	-	1030	2271	340	50	BSW
235/55R19 XL	-	105	H	8.2	245	7 1/2J	741	-	925	2039	340	50	BSW
245/45R19 XL	-	102	H	8.2	243	8J	703	-	850	1874	340	50	BSW
255/50R19 XL	-	107	H	8.2	265	8J	739	-	975	2149	340	50	BSW
255/55R19 XL	-	111	H	8.2	265	8J	763	-	1090	2403	340	50	BSW
275/40R20 XL	-	106	H	8.2	278	9 1/2J	728	-	950	2094	340	50	BSW
275/45R20 XL	-	110	H	8.2	273	9J	756	-	1060	2337	340	50	BSW

The labeling information is subject to change without notice.

A503 M+S



Ideal for conditions in the region which does not require extreme snow tyres and more performance is required.

This unique tread design also features a proven modular tread block geometry which offer a level of grip and performance which is unique in its class.

A Directional tyre that offers fantastic water dispersion and exceptional grip thanks to its unique features which includes an excessive number of sips allowing the tread to conform to the road surface, and its extra wide channels that excavates fluids in preposition to the pressure and weight of the vehicle and road requirements.

Performance Test



STABILITY




SNOW&ICE



BRAKING



DRAINAGE

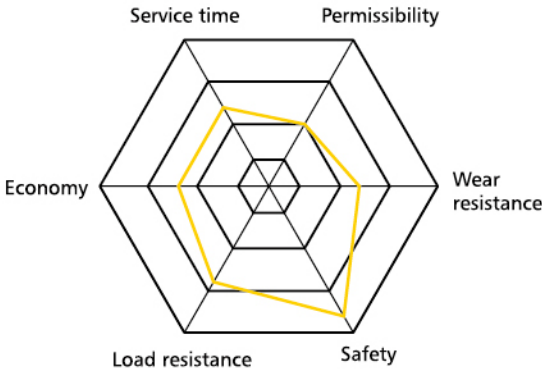

71-73

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/65R14 XL	-	86	T	8.8	177	5J	584	-	530	1168	340	50	BSW
185/65R14 XL	-	90	T	8.8	189	5 1/2J	596	-	600	1323	340	50	BSW
185/60R15 XL	-	88	T	8.8	189	5 1/2J	603	-	560	1235	340	50	BSW
185/65R15 XL	-	92	T	8.8	189	5 1/2J	621	-	630	1389	340	50	BSW
195/60R15 XL	-	92	T	8.8	201	6J	615	-	630	1389	340	50	BSW
195/65R15 XL	-	95	T	8.8	201	6J	635	-	690	1521	340	50	BSW
205/55R16 XL	-	94	T	8.8	214	6 1/2J	632	-	670	1477	340	50	BSW
205/60R16 XL	-	96	T	8.7	209	6 J	652	-	710	1565	340	50	BSW
215/60R16 XL	-	99	T	8.8	221	6 1/2J	664	-	775	1709	340	50	BSW
215/65R16 XL	-	102	T	8.8	221	6 1/2J	686	-	850	1874	340	50	BSW
215/70R16	-	100	T	8.8	221	6 1/2J	708	-	800	1764	300	44	BSW
225/60R16 XL	-	102	T	8.8	228	6 1/2J	676	-	850	1874	340	50	BSW
225/65R16 XL	-	104	T	8.8	228	6 1/2J	698	-	900	1984	340	50	BSW
235/70R16	-	106	T	8.7	240	7J	736	-	950	2094	300	44	BSW
215/55R17 XL	-	98	H	8.7	226	7J	668	-	750	1653	340	50	BSW
215/60R17 XL	-	100	H	8.7	221	6 1/2J	690	-	800	1764	340	50	BSW
225/45R17 XL	-	94	H	8.8	225	7 1/2J	634	-	670	1477	340	50	BSW
225/50R17 XL	-	98	H	8.7	233	7J	658	-	750	1653	340	50	BSW
225/55R17 XL	-	101	H	8.7	233	7J	680	-	825	1819	340	50	BSW
225/60R17 XL	-	103	H	8.7	228	6 1/2J	702	-	875	1929	340	50	BSW
225/65R17 XL	-	106	T	8.7	228	6 1/2J	724	-	950	2094	340	50	BSW
235/65R17 XL	-	108	T	8.7	240	7J	738	-	1000	2205	340	50	BSW
245/65R17 XL	-	111	T	8.7	248	7J	750	-	1090	2403	340	50	BSW
265/70R17	-	115	T	8.8	272	8J	804	-	1215	2679	300	44	BSW
185/75R16C	8PR	104/102	R	8.8	184	5J	684	-	900/850	1985/1875	475	69	BSW
235/65R16C	8PR	115/113	R	9.7	240	7J	712	-	1215/1150	2680/2535	475	69	BSW
LT225/75R16	10PR	115/112	S	10.2	223	6J	744	-	1215/1120	2680/2470	475	69	BSW
LT245/75R16	10PR	120/116	S	10.2	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT245/70R17	10PR	119/116	S	10.2	248	7J	776	-	1360/1250	3000/2755	550	80	BSW
LT265/70R17	10PR	121/118	S	10.2	272	8J	804	-	1450/1320	3195/2910	550	80	BSW

A505 M+S



Two longitudinal and two wavy wide drainage ditch, effectively enhance the water evacuation performance, ensure the excellent handling performance in adverse weather condition.

Two asymmetric pattern design, with solid blocks, effectively enhance the grasping and safety on winter road condition.

Substantial knife-shaped grooves with wavy steel sheet, keep optimized handling in contact, sharp edge provide outstanding traction on wet and slippery surface and winter road condition.

New tread pattern design, lower-heat tread formulation, softer Shore Hardness tread than the last generation tire.



71-74

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load		MAX Pressure		Sidewall Description
									Kg	lbs	Kpa	Psi	
145/70R12	-	69	T	7.8	150	4.50B	509	-	325	716	300	44	BSW
175R14C	-	99/98	R	8.2	178	5J	634	-	775/750	1710/1655	450	65	BSW
185R14C	-	102/100	R	8.2	188	5 1/2J	650	-	850/800	1875/1765	450	65	BSW
195/60R14	-	86	H	8.3	201	6 J	590	-	530	1168	300	44	BSW
215/75R15	-	100	T	8.3	216	6J	703	-	800	1764	300	44	BSW
195/60R16	-	89	H	8.3	201	6J	640	-	580	1279	300	44	BSW
205/55R16	-	91	H	8.3	214	6 1/2J	632	-	615	1356	300	44	BSW
225/55R17 XL	-	101	H	8.3	223	7J	680	-	825	1819	340	50	BSW
225/65R17	-	102	T	8.3	228	6 1/2J	724	-	850	1874	300	44	BSW
215/55R18	-	95	H	8.2	226	7J	693	-	690	1521	300	44	BSW
225/60R18	-	100	H	8.2	228	6 1/2J	727	-	800	1764	300	44	BSW
265/60R18	-	110	T	8.2	272	8J	775	-	1060	2337	300	44	BSW
285/60R18	-	116	T	8.2	292	8 1/2J	799	-	1250	2756	300	44	BSW
235/55R19 XL	-	105	H	8.2	245	7 1/2J	741	-	925	2039	340	50	BSW
245/55R19 XL	-	107	H	8.2	253	7 1/2J	753	-	975	2149	340	50	BSW
245/45R20 XL	-	103	H	8.2	243	8J	728	-	875	1929	340	50	BSW
245/50R20	-	102	H	8.2	253	7 1/2J	754	-	850	1874	300	44	BSW
255/55R20 XL	-	110	H	8.2	265	8J	788	-	1060	2337	340	50	BSW
285/50R20 XL	-	116	H	8.5	297	9 J	794	-	1250	2756	340	50	BSW
275/45R21 XL	-	110	H	8.5	273	9J	781	-	1060	2337	340	50	BSW

The labeling information is subject to change without notice.

Performance Test



STABILITY



ECONOMY



SILENCE



WET

